

SWITCHING ADAPTER



- ET-SWITCHING ADAPTER 15V 3A (A-AP-A-00090)
- ET-SWITCHING ADAPTER 12V 3A (A-AP-A-00047)
- ET-SWITCHING ADAPTER 5V 3A (A-AP-A-00054)

It uses SWITCHING POWER SUPPLY and suitable for quality control project, using in project work that uses small POWER SUPPLY but high Volatge, andproject works that UL / TUV/ CE/ SA/ ISO Warrantee.



INPUT : AC INPUT 100-240VAC with 3 PIN Male Port  
 OUTPUT: 12V 3A in ET-SWITCHING ADAPTER 12V 3A  
 : 5V 3A in ET-SWITCHING ADAPTER 5V 3A  
 PORT CONNECTOR : FEMALE JACK 2.5mm. PORT Inside is Cathode and Outside is Anode.  
 STANDARD WARRANTEE : UL / TUV/ CE/ SA/ ISO  
 \* Is not include 3 PIN AC CABLE Price 35.-,so user need to purchase additionally.


- ET-SWITCHING ADAPTER 12V 1A TYPE J (A-AP-A-00098)
- ET-SWITCHING ADAPTER 12V 1A TYPE H (A-AP-A-00100)



DC POWER SUPPLY SWITCHING  
 INPUT : 220VAC, 50/60Hz 0.5A  
 OUTPUT : 12VDC 1A

TYPE J : FEMALE JACK 2.5 mm.  
 Internal Connector is cathode and External Connector is anode.  
 TYPE H : 2.5mm. HOUSING TYPE

Weight = 80 g.

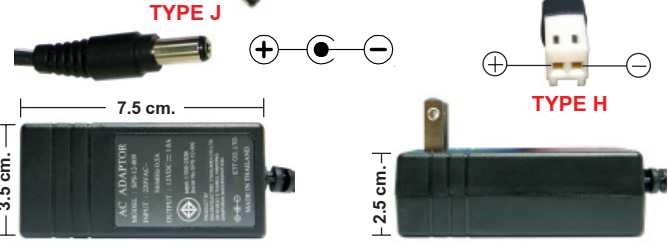


- ET-SWITCHING ADAPTER 5V 2A TYPE H (A-AP-A-00094)
- ET-SWITCHING ADAPTER 5V 2A TYPE J (A-AP-A-00093)
- ET-SWITCHING ADAPTER 5V 2A TYPE B (A-AP-A-00095)



DC POWER SUPPLY SWITCHING  
 INPUT : AC INPUT 220VAC 50/60Hz 0.5A  
 OUTPUT : DC 5V/2.0A (10W)

TYPE J : FEMALE JACK 2.5 mm.  
 Internal Connector is cathode and External Connector is anode.  
 TYPE H : HOUSING 2.5 mm. TYPE  
 TYPE B : HOUSING 2.50 mm. 2 PIN Header.

Weight = 100 g.

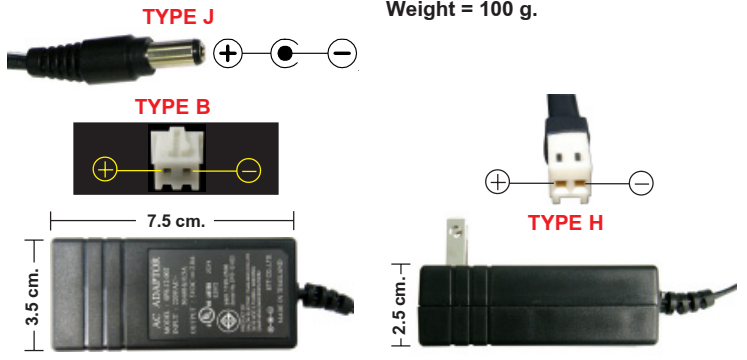

- CABLE POWER 3 P AC 1.8M (A-CB-A-00002)

- ET-SWITCHING ADAPTER 12V 0.5A TYPE H (A-AP-A-00056)
- ET-SWITCHING ADAPTER 12V 0.5A TYPE J (A-AP-A-00057)



All 5 versions are POWER SUPPLY as SWITCHING types, it is suitable for various project works that needs high quality and accurate. It is also warranted by UL/TUV/CE/SA.

INPUT : AC INPUT 100 - 240VAC 3 PIN MALE  
 OUTPUT: 12VDC 0.

CONNECTOR of version 12V 0.5A AND 5V 1.2A TYPE J is FEMALE JACK 2.5 mm. Internal Connector is cathode and External Connector is anode.  
 CONNECTOR of version 12V 0.5A TYPE H is 2.5mm. HOUSING TYPE.

DC ADAPTER

- ADAPTER 10VDC 850mA. (A-AP-A-00001)

INPUT 220VAC  
 OUTPUT 10VDC/850mA

