


Accessories for Board I2C

ET-USB USART/TTL (P-ET-A-00580)

This Board converts signal from USB PORT of computer PC or MAC APPLE to RS232 PORT; this RS232 PORT has Sign Level of TTL that is more convenient to directly connect to boards via PIN MCU.

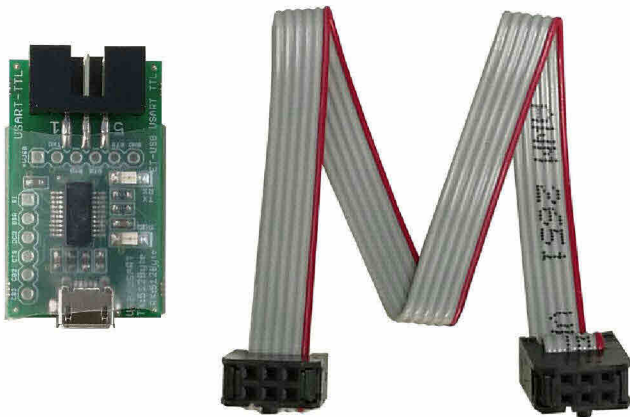

- Use IC No.FT231XS from FTDI; don't worry about finding DRIVER for working with OS Operating System or OS in the future
- Connector on the side of USB PORT is MICRO USB FEMALE B TYPE and Connector on the side of RS232 TTL is 6 PIN IDC MALE; and PIN HEADER of FT231XS is provided, it is more convenient for user to connect additionally
- Directly connect Development Program to ET-ESP8266-RS485
- Run on OS WINDOWS 98/SE/ME/2000/XPI7/8/10/LINUX/MAC OS
- Package of ET-USB USART/TTL includes...

1. ET-USB USART/TTL
2. CABLE PAIR 6 PIN CON2 20 cm.
3. CD-ROM DRIVER



(CABLE is connected via USB PORT is OPTION; it can be used with CABLE USB MICRO of general cellphone)

CABLE USB/MICRO 1M (A-CB-A-00045)



This CABLE USB is 1 meter long. One side is Connector TYPE A to connect to computer and another side is MICRO USB TYPE B MALE to connect to board.

WAFER CON 2.50 mm. STRAIGHT MALE

- WAFER CON 6 PIN 2.50MM STRAIGHT (A-CO-A-00020)
- WAFER CON 5 PIN 2.50MM STRAIGHT (A-CO-A-00293)
- WAFER CON 4 PIN 2.50MM STRAIGHT (A-CO-A-00088)
- WAFER CON 3 PIN 2.50MM STRAIGHT (A-CO-A-00168)
- WAFER CON 2 PIN 2.50MM STRAIGHT (A-CO-A-00161)



RJ-I2C-M (P-CB-A-00039)



One side is Connector RJ11 and another one is 6 of PIN HEADER MALE. This cable is 20 cm. long.

RJ-I2C-F (P-CB-A-00040)



One side is Connector RJ11 and another one is 6 of PIN HEADER FEMALE. This cable is 20 cm. long.

RJ-I2C-RJ (P-CB-A-00041)



Both sides are Connector RJ11; PIN 1 accords with PIN 1 of another side. This cable is 20 cm. long.

4P-I2C-4P (P-CB-A-00042)



Both sides are Connector FEMALE HOUSIN 4 PIN 2.50 mm. This cable is 20 cm. long.

สายแพร์ 6P CON2 20 cm. (P-CB-A-00043)



DIN35 RAIL 49 CM (A-BX-I-00061)



This is aluminum rail to be attached with board by DIN35; it is 49.7 cm long.

HOUSING CON 2.50 mm. ตัวเมีย

- HOUSING CON 2.50MM 2 PIN (A-CO-A-00162)
- HOUSING CON 2.50MM 3 PIN (A-CO-A-00169)
- HOUSING CON 2.50MM 4 PIN (A-CO-A-00089)
- HOUSING CON 2.50MM 5 PIN (A-CO-A-00268)
- HOUSING CON 2.50MM 6 PIN (A-CO-A-00022)
- ไส้ CON CRIMP 2.50MM (A-CO-T-00002)

